

Replacement Parts for Model LDAP Indoor, Downflow, Packaged Heaters

IMPORTANT


1. Always include complete heater model and serial number so that any specification change can be considered for parts replacement. It can save time and expense.
2. Specifications are subject to change without notice.
3. We reserve the right to substitute functional replacements
4. Order by P/N; not Heater Option Designation.

Indirect Fired, Indoor, Downflow Packaged Heaters



Model LDAP 1200

Model LDAP Configurations

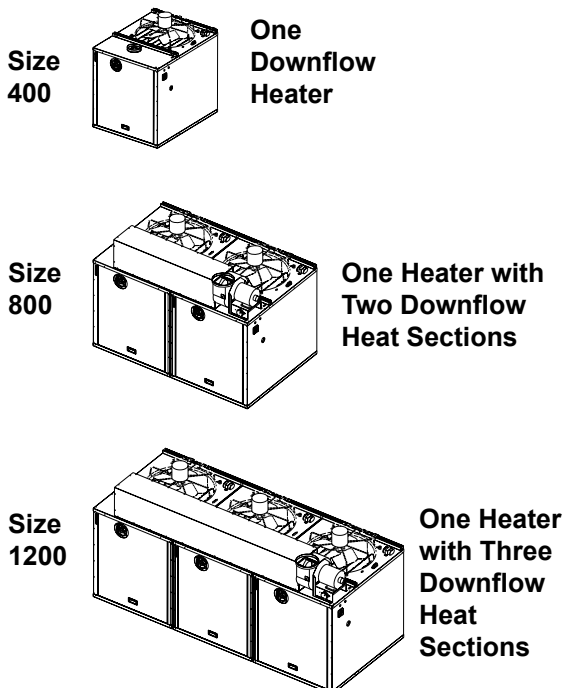

Warranty - Model LDAP

One-year limited warranty on the heater.
Contact your distributor for details.

Index

<p>B</p> <p>Circuit Board 3, 4 Burner Assembly 6</p> <p>C</p> <p>Cabinet Parts 8 Capacitor 3, 4 Configurations 1 Control Locations 3 Cover for Thermostat 4</p> <p>D</p> <p>Date of Manufacturer 2 Destratification Fan Control 3, 4 Destratification Relay 3 Disconnect Switch 3, 4 Door Handle 8 DSI Control 3, 4</p> <p>E</p> <p>Electrical Components 3, 4</p> <p>F</p> <p>Fan Blade 5 Fan Guard 5 Fan Parts 5 Flame Sensor 3, 4 Fuse 3, 4</p> <p>G</p> <p>Gas Conversion Kits 6 Gasket 5 Gasket Kit 6 Gas Valve 3</p> <p>H</p> <p>Hanger Kit 7 Hardware Package 8 Heat Exchanger 6 Hole Plug 8</p> <p>I</p> <p>Ignitor 3, 4 Ignitor Wire 3</p> <p>L</p> <p>High Limit 4 Limit Control 3, 4 Louver 8 Louvers (Same as Option CD32) 7</p>	<p>M</p> <p>Fan Motor 3, 5 Flue Collection (Unit) Venter Motor 3 Venter Motor 3, 4 Multiple Heater Control 4</p> <p>N</p> <p>Nozzles (Same as Options CD57, CD58, and CD59) 7</p> <p>O</p> <p>Orifice 6 Orifice Adapter 6</p> <p>P</p> <p>Paint 8 Pressure Switch 3, 4, 5 Pressure Tap 5</p> <p>R</p> <p>Rating Plate 2 Relay 3, 4</p> <p>S</p> <p>Sensing Probe Assembly 5 Serial No. 2 Sight Hole Cover 6 Compression Spring 7, 8</p> <p>T</p> <p>Terminal Board 3 Terminal Strip 4 Thermostat Accessories 4 Thermostats 4 Transformer 3, 4</p> <p>V</p> <p>Gas Valve 4 Shutoff Ball Valve 6 Vent Cap 8 Venter Housing 5 Venter Motor 5 Venter Motor & Wheel Assy 5 Venter Parts 5 Venter Wheel 5</p> <p>W</p> <p>Warranty 1 Wiring Harness 3</p>
---	--

Rating Plate and Serial No.

Example of a Model LDAP Rating Plate

REZNOR®
 MERCER, PA. USA 16137
 MADE IN MEXICO
UNIT HEATER
CATEGORY III
 ANSI Z83.8 [AA] [A] CSA 2.6 [AA'] [A'] UNIT HEATER
MODEL [B] [C]
SERIAL NO.
 [D] VOLTS [D] PH [D] HZ MAXIMUM TOTAL INPUT [D] AMPS
TYPE OF GAS: [E]
 FOR USE AT 0-2000 FEET, 0-610 METERS OF ALTITUDE.
 ORIFICE SIZE [F] DRILL
 NORMAL INPUT [J] BTU/HR
 THERMAL OUTPUT CAPACITY [L] BTU/HR
 MINIMUM INPUT [M] BTU/HR
 NORMAL MANIFOLD PRESSURE [G] IN.W.C.
 MIN. PERMISSIBLE GAS SUPPLY PRESSURE
 FOR PURPOSE OF INPUT
 ADJUSTMENT. [H] IN.W.C.
 CLEARANCES TO COMBUSTIBLE CONSTRUCTION: TOP -12",
 FLUE CONNECTION - 6", REAR -18", SIDE -2", DISCONNECT SIDE
 - 18"
 BOTTOM - 60", FRONT - 2"
 FOR ALTERNATE INSTALLATIONS USE THE LATEST EDITIONS OF
 THE APPROPRIATE STANDARD LISTED BELOW:
 FOR AIRCRAFT HANGARS USE STANDARD ANSI/NFPA 409
 FOR PARKING STRUCTURES USE STANDARD ANSI/NFPA 88A
 FOR REPAIR GARAGES USE STANDARD ANSI/NFPA 88B
 THIS UNIT IS NOT FOR USE WITH DUCTS.
 THIS UNIT IS NOT FOR USE WITH FILTERS.

Rating Plate Key

A	Date of ANSI Standard
A'	Date of CSA Standard
B	Model No.
C	Month and Year of Manufacture
D	Voltage, Phase, 60 Hertz, Maximum Total Input Amps
E	Natural or Propane Gas
F	Orifice Size
G	Manifold Pressure (3.5" w.c. Natural Gas; 10" w.c. Propane Gas)
H	Minimum Gas supply Pressure (5.0" w.c. Natural Gas; 11.0" w.c. Propane Gas)
J	BTU Normal Input Sea Level
L	BTU Thermal Output Sea Level
M	BTU Minimum Input Sea Level

Decoding a Serial No.

Example of a Serial No. BDF...79...X7...N...00000

Code Nos.	1	2	3	4	5
<u>Code No.</u>	<u>Explanation</u>				
1	Date of manufacture (see table below)				
2	Type of ignition system				
3	Type of gas valve				
4	Gas (N = natural; L = propane)				
5	Consecutive number (identification only)				

First Element of the Serial Number - Date of Manufacturer


Year	Jan	Feb	Mar	Apr	May	June	July	Aug	Sept	Oct	Nov	Dec
2004	BDA	BDB	BDC	BDD	BDE	BDF	BDG	BDH	BDI	BDJ	BDK	BDL
2005	BEA	BEB	BEC	BED	BEE	BEF	BEG	BEH	BEI	BEJ	BEK	BEL
2006	BFA	BFB	BFC	BFD	BFE	BFF	BFG	BFH	BFI	BFJ	BFK	BFL
2007	BGA	BGB	BGC	BGD	BGE	BGF	BGG	BGH	BGI	BGJ	BGK	BGL
2008	BHA	BHB	BHC	BHD	BHE	BHF	BHG	BHH	BHI	BHJ	BHK	BHL
2009	BIA	BIB	BIC	BID	BIE	BIF	BIG	BIH	BII	BIJ	BIK	BIL
2010	BJA	BJB	BJC	BJD	BJE	BJF	BJG	BJH	BJI	BJJ	BJK	BJL
2011	BKA	BKB	BKC	BKD	BKE	BKF	BKG	BKH	BKI	BKJ	BKK	BKL
2012	BLA	BLB	BLC	BLD	BLE	BLF	BLG	BLH	BLI	BLJ	BLK	BLL
2013	BMA	BMB	BMC	BMD	BME	BMF	BMG	BMH	BMI	BMJ	BMK	BML
2014	BNA	BNB	BNC	BND	BNE	BNF	BNG	BNH	BNI	BNJ	BNK	BNL
2015	BOA	BOB	BOC	BOD	BOE	BOF	BOG	BOH	BOI	BOJ	BOK	BOL
2016	BPA	BPB	BPC	BPD	BPE	BPF	BPG	BPH	BPI	BPJ	BPK	BPL
2017	BQA	BQB	BQC	BQD	BQE	BQF	BQG	BQH	BQI	BQJ	BQK	BQL
2018	BRA	BRB	BRC	BRD	BRE	BRF	BRG	BRH	BRI	BRJ	BRK	BRL
2019	BSA	BSB	BSC	BSD	BSE	BSF	BSG	BSH	BSI	BSJ	BSK	BSL
2020	BTA	BTB	BTC	BTD	BTE	BTF	BTG	BTH	BTI	BTJ	BTK	BTL

References


Printed Forms (Request by Form designation; not P/N).....	Form	P/N
Installation/Operation/Maintenance Manual - Model LDAP	I-LDAP	207733
Gas Conversion Instructions	I-LDAP-GC	208881
High Altitude (above 6000 ft) Instructions	I-LDAP-HA	208081
Website (downloadable files of all printed forms are on the Website)		
www.RezSpec.com		

Electrical Components (See illustrations on page 4.)

Control Locations - Typical "Main" Heat Section Control Compartment - All Sizes

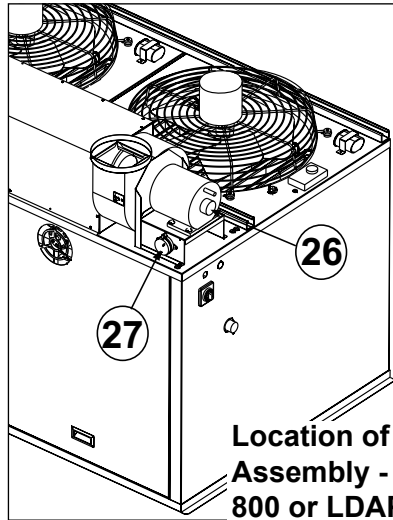




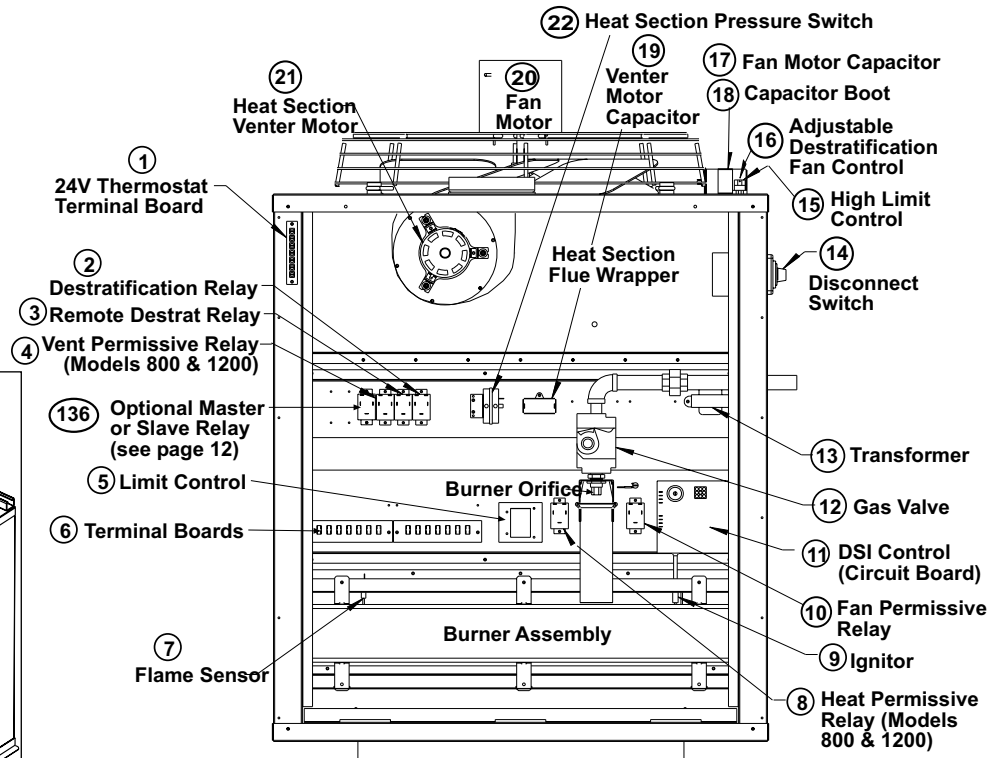






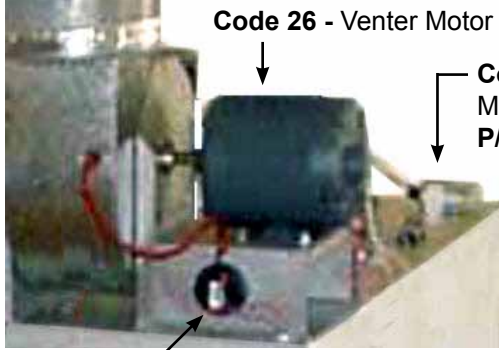


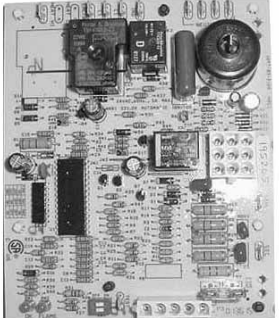






Location of the Venter Assembly - Model LDAP 800 or LDAP 1200



Code	Description	LDAP Size	400	800	1200
		Quantity (unless stated otherwise in parenthesis)	1	2	3
1	24V, 7-pole Terminal Board			164545	
2 & 3	Destratification Relays, SPST, 24V coil	Units beginning 9/11 (Serial No. Code BKH) For units manufactured prior to 9/11, order Kit P/N 263527 to replace relay, P/N 98118.	Relay 211411 / Base 211415		
4	Vent Permissive Relay, SPST	Units beginning 9/11 (Serial No. Code BKH) For units manufactured prior to 9/11, order Kit P/N 263529 to replace relay, P/N 130821.	■	AK2 (208V) - Relay, 211413 / Base 211415 AK3 (230V) - Relay, 211414 / Base 211415	
5	Limit Control, 240°F, Silver Dot		202048		
6	7 Pole Terminal Strip		(2) 164544	(5) 164544	(7) 164544
7	Flame Sensor		195292		
8	Heat Permissive Relay, SPST, 24V coil	Units beginning 9/11 (Serial No. Code BKH) For units manufactured prior to 9/11, order Kit P/N 263527 to replace relay, P/N 98118.	Relay 211411 / Base 211415		
9	Ignitor		175272		
10	Fan Permissive Relay, SPDT	Units beginning 9/11 (Serial No. Code BKH) For units manufactured prior to 9/11, order Kit P/N 263529 to replace relay, P/N 157808.	■	AK2 (208V) - Relay, 211413 / Base 211415 AK3 (230V) - Relay, 211414 / Base 211415	
11	DSI Control (Circuit Board)		195265		
11A	Fuse for Code 11 DSI Control		201685		
12	Gas Valve	Natural Gas Propane	Single Stage 196981; Two Stage 197067 Single Stage 196983; Two Stage 197065		
13	Transformer, 208/240V, 40VA		194536		
14	Disconnect Switch, 40 Amp		(1) 207948		
15	High Limit Control, Manual Reset, L-150°		112753 (White Dot)		
16	Adjustable Destratification Fan Control		(1) 207929		
17	Capacitor, 20uF@370VAC (Fan Motor)		207582		
18	Capacitor Boot, Syntex #M-78		103182		
19	Capacitor (Venter Motor)		195641		
20	Fan Motor, 208/230V, 1 HP, 3 speed		207734, AOS F48U34A13		
21	Heat Section Venter Motor, 208/240V		196830		
22	Pressure Switch (Heat Section)	<6000ft elevation 6000ft and above	197028 Yellow Label 197029 Light Blue Label		
23 & 24	Wiring Harness		5-Circuit 208043; 9-Circuit 208224		
25	Ignitor Wire	Not illustrated	208231		
26	Flue Collection (Unit) Venter Motor		■	16074, AOS C199	
27	Flue Collection (Unit) Pressure Switch		■	205445	

Electrical Components (cont'd)

<p>Code 1 - 24V, 7-Pole Terminal Strip, P/N 164545</p> 	<p>Code 5 - Limit Control 240°F, Silver Dot, P/N 202048</p> 	<p>Code 11 - DSI Control (Circuit Board), P/N 195265</p> <p>If fuse needs to be replaced, use P/N 201685 or field-supplied Type ATC or ATO 3, color violet.</p> 			
<p>Codes 2, 3, 4, 8, and 10 - Relay and Socket (Base)</p>  <p>Relay, 24V, P/N 211411 Relay, 208V, P/N 211413 Relay, 230V, P/N 211414 Relay Base (Socket), P/N 211415</p> <p>Relay Replacement Kits: Codes 2, 3, and 8 - To replace 24V coil relay, P/N 98118, order Kit P/N 263527. Codes 4 and 10 - To replace 208/230V coil relay, P/N 130821 or P/N 157808, order Kit P/N 263529.</p>	<p>Code 6 - 7-Pole Terminal Strip, P/N 164544</p> 	<p>Code 12 - Gas Valve</p> <p>Single-Stage, Natural Gas, P/N 196981 (Serial No. Code Y3 or Z8); Propane, P/N 196983, Serial No. Code Y5 or 1A</p>  <p>Two-Stage, Natural Gas, P/N 197067 (Serial No. Code Y9 or 5A); Propane, P/N 197065, Serial No. Code Y7 or 3A</p> 			
<p>Code 13 - 208/240V Transformer, P/N 194536</p> 	<p>Code 14 - Disconnect Switch, P/N 207948</p> 	<p>Code 15 - High Limit, Manual Reset, L-150°F, White Dot, P/N 112753</p> 			
<p>Code 16 - Destratification Fan Control, P/N 207929</p> 	<p>Code 19 - Capacitor (Venter Motor), P/N 195641</p> 	<p>Code 26 - Venter Motor</p>  <p>Code 17 - Fan Motor Capacitor, P/N 207582</p> <p>Code 18 - Boot for Fan Motor Capacitor, P/N 103182</p> <p>Code 27 - Flue Collection Box Pressure Switch, P/N 205445</p>			
<p>Code 22 - Pressure Switch (Heat Section) - see P/N's, by altitude on page 3.</p> 	<p>Thermostats and Thermostat Accessories</p> <table border="0"> <tr> <td data-bbox="99 1566 521 1753"> <p>Code 30 - Single-Stage Thermostat, 24 volt, 50-90°F with Fan Switch, P/N 255350 (Same as Option CL1)</p>  </td> <td data-bbox="529 1566 1024 1753"> <p>Code 31 - Two-Stage Digital Thermostat with Fan Switch, 24 volt, P/N 220630 (Same as Option CL22)</p>  </td> <td data-bbox="1032 1566 1471 1753"> <p>Code 32 - Locking Cover for Thermostat Option CL1, P/N 257464 (Same as Option CM1)</p> <p>Code 33 - Locking Cover for Thermostat Option CL2, P/N 257463 (Same as Option CM1B)</p> </td> </tr> </table>		<p>Code 30 - Single-Stage Thermostat, 24 volt, 50-90°F with Fan Switch, P/N 255350 (Same as Option CL1)</p> 	<p>Code 31 - Two-Stage Digital Thermostat with Fan Switch, 24 volt, P/N 220630 (Same as Option CL22)</p> 	<p>Code 32 - Locking Cover for Thermostat Option CL1, P/N 257464 (Same as Option CM1)</p> <p>Code 33 - Locking Cover for Thermostat Option CL2, P/N 257463 (Same as Option CM1B)</p>
<p>Code 30 - Single-Stage Thermostat, 24 volt, 50-90°F with Fan Switch, P/N 255350 (Same as Option CL1)</p> 	<p>Code 31 - Two-Stage Digital Thermostat with Fan Switch, 24 volt, P/N 220630 (Same as Option CL22)</p> 	<p>Code 32 - Locking Cover for Thermostat Option CL1, P/N 257464 (Same as Option CM1)</p> <p>Code 33 - Locking Cover for Thermostat Option CL2, P/N 257463 (Same as Option CM1B)</p>			


Code 34 - Kits for Control of Multiple Heaters (Size 400, max 6; Size 800, max 3; Size 1200, max 2)

* If replacing a relay only (P/N 98118) used previously, order Replacement P/N 263527.


Qty	P/N	Description
Option CL31 for LDAP - Pkg P/N 208366 for the Control Heater and one Additional Heater		
2	208365	Relay Assemblies each consisting of P/N 211411*, Relay Plug, 24VAC, DPDT; 211415 Relay Socket; 42" red wire, 42" white wire, 6" blue wire, & 6" brown wire (all w/terminals).
2	208185	Wiring Diagram Label
Option CL32 for LDAP - Pkg P/N 208367 for each Additional Heater		
1	208365	Relay Assembly (same description as above)
1	208185	Wiring Diagram Label

Heat Section Venter Parts - All Sizes


Code	Description	LDAP Size	400	800	1200
40	Venter Housing	See illustration on page 8.	(1) 209205	(2) 209205	(3) 209205
41	Venter Housing Gasket		(1) 196013	(2) 196013	(3) 196013
42	Static Pressure Tap		(2) 116043	(4) 116043	(6) 116043
21	Venter Motor, 208/240V (page 3)		(1) 196830	(2) 196830	(3) 196830
43	Venter Mounting Bracket		(1) 195072	(2) 195072	(3) 195072
44	Venter Isolator		(3) 194534	(6) 194534	(9) 194534
45	Venter Isolator Bushing		(3) 194803	(6) 194803	(9) 194803
46	Venter Motor Plate		(1) 194910	(2) 194910	(3) 194910
47	Motor Plate Gasket		(1) 201472	(2) 201472	(3) 201472
48	Venter Motor Clip		(3) 194805	(6) 194805	(9) 194805
49	#8-32 x 1/2" lg slotted screw (for clip)	Mntng Brckt to Mtr Plate	(3) 92851	(6) 194806	(9) 194806
50	#10-24x3/4"lg screw		(3) 202949	(6) 202949	(9) 202949
51	#10-24 Hex nut		(3) 111377	(6) 111377	(9) 111377
52	Venter Wheel		(1) 195666	(2) 195666	(3) 195666
53	Cooling Fan		(1) 196035	(2) 196035	(3) 196035

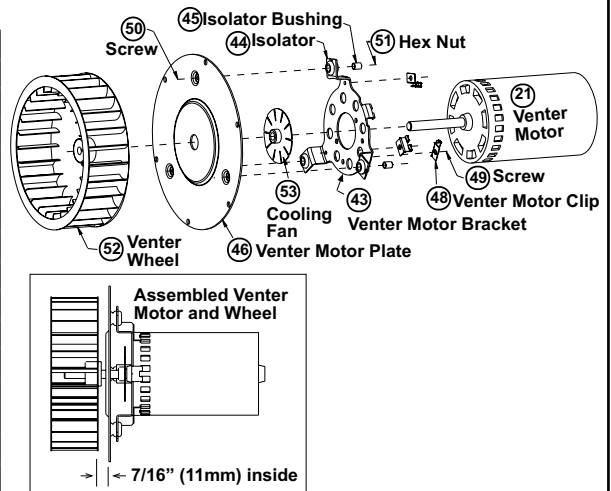


Flue Collection (System) Venter Parts - Sizes 800 and 1200

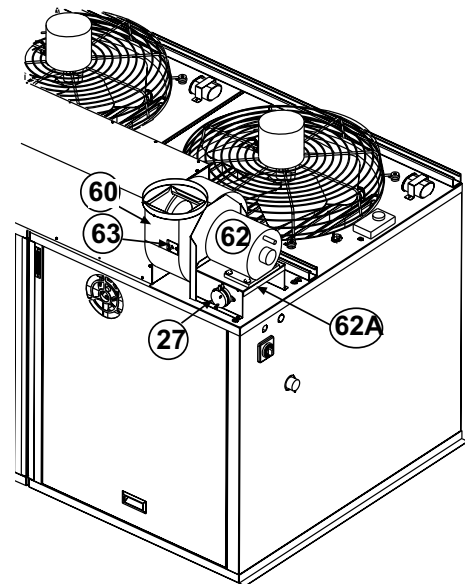


Code	Description	LDAP Size	400	800	1200
60	Flue Collection (System) Venter Housing	■		151343	
61	Flue Collection Venter Gasket (between venter housing and flue collection box - not illustrated)	■		149857	
62	Venter Motor & Wheel Assy (includes Codes 26 and 62A-E)	■		208389	
26	Venter Motor (component of Code 62)	■		16074	
62A	Motor Base Assembly	■		207837	
62B	1/4-20-3/4" Hex Head Cap Screws	■	(4)	16246	
62C	3/8" Plain Washer SAE	■	(4)	6593	
62D	1/4-20 Hex Nut with Toothed Washer	■	(4)	10650	
62E	Wheel, Torrington #AA-729-419-1-7-29/32-4-17/32	■		8735	
63	Flow Sensing Probe Assembly	■		151559	
64	Silicone Rubber Tubing 13" long (not illustrated)	■		174399	

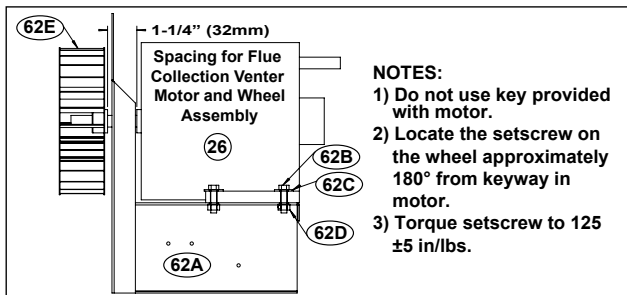

Fan Parts

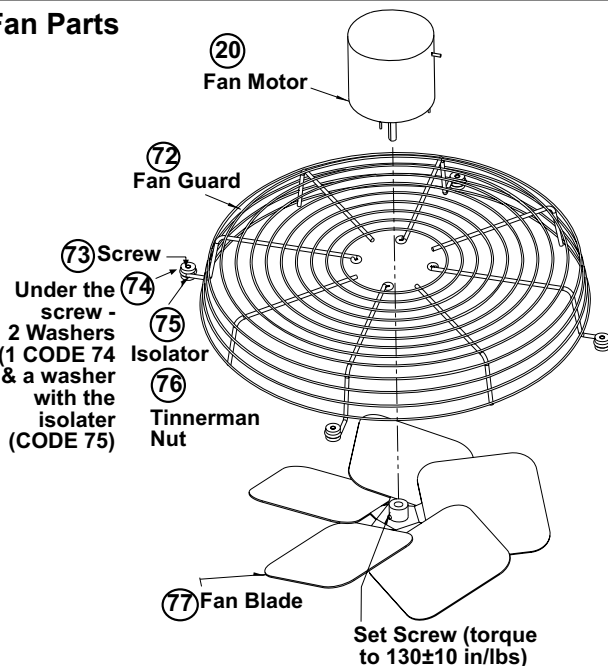

Code	Description	LDAP 400	LDAP 800	LDAP 1200
20	Motor, 208/230V, 1 HP, 3 speed, A.O.Smith F48U34A13	(1) 207734	(2) 207734	(3) 207734
72	Fan Guard	(1) 170086	(2) 170086	(3) 170086
73	Screw	(4) 96452	(8) 96452	(12) 96452
74	Flat Washer	(4) 196646	(8) 196646	(12) 196646
75	Isolator with washer	(4) 96451	(8) 96451	(12) 96451
76	Tinnerman Nut	(4) 54633	(8) 54633	(12) 54633
77	Fan Blade	(1) 207729	(2) 207729	(3) 207729
78	Nut	(4) 31522	(8) 31522	(12) 31522
79	Washer	(8) 196646	(16) 196646	(24) 196646

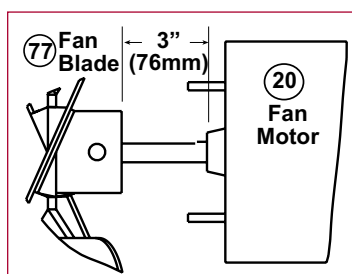


Code 80 - Replacement Heat Exchanger


Code	Description	LDAP Size			
		400	800	1200	
80	Replacement Heat Exchanger Assembly* with Gasket Kit	Aluminized Steel	1	2	3
		409 Stainless Steel	209209	209210	209211
80A	Heat Exchanger Gasket Kit				

* Includes heat exchanger assembled with Codes 152, 153, 154, and 155 - see page 8. Gaskets are field installed.

*Part of the heat exchanger assembly; see page 6 for component P/N's.

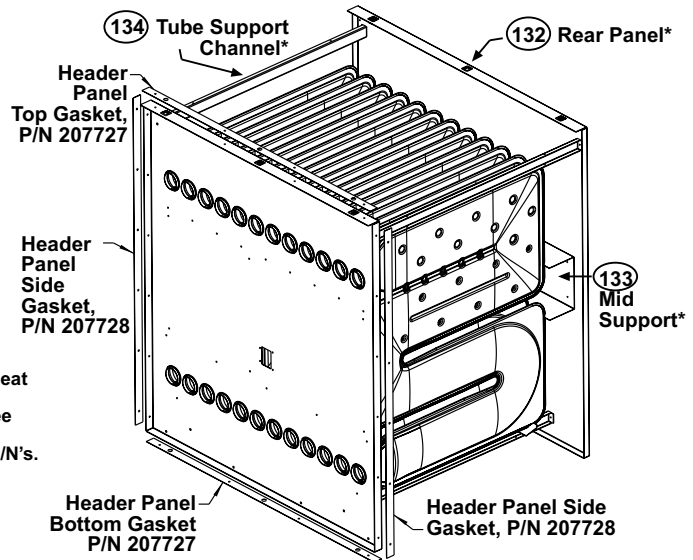

Burner

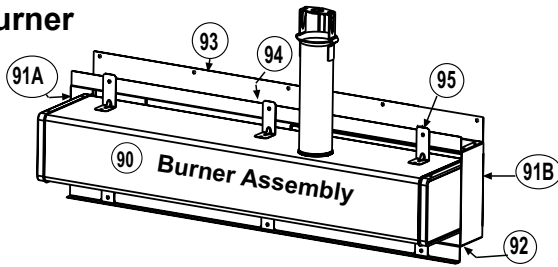

Code	Description	LDAP Size		
		400	800	1200
		Qty (unless in parenthesis)		
90	Burner Assembly (front section in the illustration including venturi tube less burner supports, Code 95)		195243	
91A	Burner Shield Side		195500	
91B	Burner Shield Side		195500	
92	Burner Shield Bottom		195521	
93	Burner Shield Top		195511	
94	Burner Shield Sight Hole Cover		10756	
95	Burner Support	(6) 196598	(12) 196598	(18) 196598
96	Burner Orifice (not illustrated)	Natural Gas	196897, 9.6mm	
		Propane	196905, 5.8mm	
97	Orifice Adapter, 3/4x3/8 Bushing	194809 (not illustrated)		
98	1/2" Nut (for attaching orifice adapter to bracket on venturi)	165702		

Code 100 - Manual Shutoff Valve, Same as Option CE1



Shutoff Ball Valve

Code	Model LDAP	400	800	1200
100	Manual Shutoff Valve (Same as Option CE1)	208103	208104	
Components:				
100A	Shutoff Ball Valve	159725, 1"	159729, 1-1/4"	
100B	Union	1141, 1"	5976, 1-1/4"	


Code 101 - Gas Conversion Kits

Natural TO Propane Conversion Kits				
Applies to:		Model LDAP 400, 800, & 1200 with a Single-Stage Gas Valve		
Kit P/N by Size				
400	800	1200		
208877	208894	208895	Kit Components:	
Qty	Qty	Qty	P/N	Description
1	2	3	98720	Regulator Spring Conversion Kit, Honeywell #393691
1	2	3	196905	Burner Orifice, 5.88mm
1	1	1	64391	Conversion Tape
1	1	1	37752	Propane Gas Disk
1	1	1	197062	High Altitude Adjustment Label (used above 2000ft/610M only)
Applies to:		Model LDAP 400 with a Two-Stage Gas Valve		
Size 400, Kit P/N 208879				
Qty	P/N	Description		
1	197207	Regulator Spring Conversion Kit, Honeywell #396021		
1	196905	Burner Orifice, 5.88mm		
1	64391	Conversion Tape		
1	37752	Propane Gas Disk		
1	197062	High Altitude Adjustment Label (used above 2000ft/610M only)		


Propane TO Natural Conversion Kits				
Applies to:		Model LDAP 400, 800, and 1200 with a Single-Stage Gas Valve		
Kit P/N by Size				
400	800	1200		
208878	208896	208897	Kit Components:	
Qty	Qty	Qty	P/N	Description
1	2	3	98721	Regulator Spring Conversion Kit, Honeywell #394588
1	2	3	196897	Burner Orifice, 9.6mm
1	1	1	64391	Conversion Tape
1	1	1	1401	Natural Gas Disk
1	1	1	197062	High Altitude Adjustment Label (used above 2000ft/610M only)
Applies to:		Model LDAP 400 with a Two-Stage Gas Valve		
Size 400, Kit P/N 208880				
Qty	P/N	Description		
1	197208	Regulator Spring Conversion Kit, Honeywell #396025		
1	196897	Burner Orifice, 9.6mm		
1	64391	Conversion Tape		
1	37752	Propane Gas Disk		
1	197062	High Altitude Adjustment Label (used above 2000ft/610M only)		

Code 110 - 4-Way Louvers (Same as Opt CD32)

Code	Model LDAP	400	800	1200
110	4-Way Louver Package P/N (Same as Option CD32)	208091	208884	208885
Components:				
110A	Louver	(7) 195578	(14) 195578	(21) 195578
110B	Louver Frame Support	(2) 207937	(4) 207937	(6) 207937
110C	Louver Frame Side	(2) 207936	(4) 207936	(6) 207936
	Hardware Bag	(1) 208355	(2) 208355	(3) 208355
Each Bag contains:				
110D	Screws, #8-18 x 3/8" long, AB point, slotted indented serrated hex washer head		(18) 195638	
	Compression Springs		(7) 195046	
	#8 x 1/2" long Tekes (self-drilling screws)		(6) 195249	

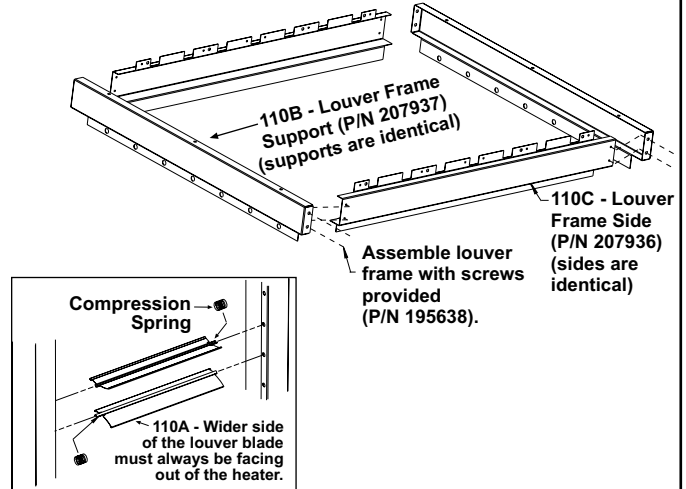

Nozzles (Same as Options CD57, CD58, and CD59)

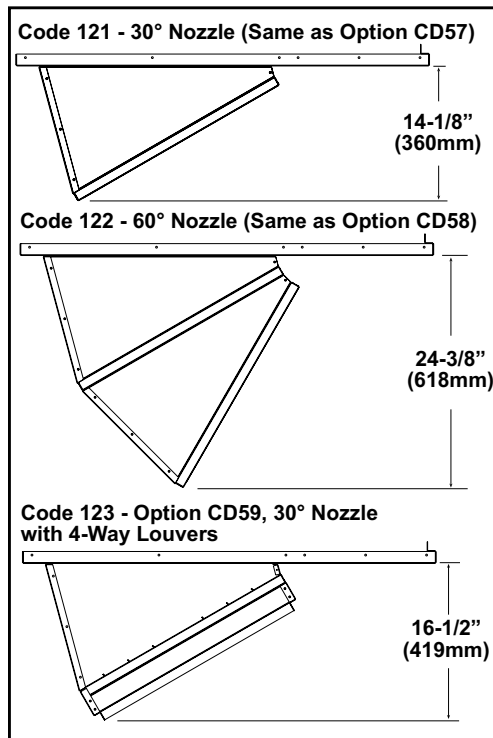

Code	LDAP Size	400	800	1200
121	30° Nozzle (Same as Option CD57)	208094	208886	208887
121A	Nozzle Section Right Side	(1) 207932	(2) 207932	(3) 207932
121B	Nozzle Section Left Side	(1) 207933	(2) 207933	(3) 207933
121C	Nozzle Section Top	(1) 207934	(2) 207934	(3) 207934
121D	Nozzle Section Bottom	(1) 207935	(2) 207935	(3) 207935
121E	Nozzle Side Filler	(2) 208747	(4) 208747	(6) 208747
	Hardware Bag	(1) 208356	(2) 208356	(3) 208356
121F	Each Bag contains: (20) 195638, Screws, #8-18 x 3/8" long AB point, slotted indented serrated hex washer head; and (6) 195249, #8 x 1/2" long TEKS (self-drilling screws)			
122	60° Nozzle (Same as Option CD58)	208097	208888	208889
122A	Nozzle Section Right Side	(2) 207932	(4) 207932	(6) 207932
122B	Nozzle Section Left Side	(2) 207933	(4) 207933	(6) 207933
122C	Nozzle Section Top	(2) 207934	(4) 207934	(6) 207934
122D	Nozzle Section Bottom	(2) 207935	(4) 207935	(6) 207935
122E	Nozzle Side Filler	(4) 208747	(8) 208747	(12) 208747
	Hardware Bag	(1) 208357	(2) 208357	(3) 208357
122F	Each Bag contains: (46) 195638, Screws, #8-18 x 3/8" long AB point, slotted indented serrated hex washer head; and (12) 195249, #8 x 1/2" long TEKS (self-drilling screws)			
123	30° Nozzle with 4-Way Louvers (Same as Option CD59)	208100	208890	208891
123A	Nozzle Section Right Side	(1) 207932	(2) 207932	(3) 207932
123B	Nozzle Section Left Side	(1) 207933	(2) 207933	(3) 207933
123C	Nozzle Section Top	(1) 207934	(2) 207934	(3) 207934
123D	Nozzle Section Bottom	(1) 207935	(2) 207935	(3) 207935
123E	Nozzle Side Filler	(2) 208747	(4) 208747	(6) 208747
123F	Louver	(7)195578	(14)195578	(21)195578
123G	Top Louver Frame Support	(1) 207937	(2) 207937	(3) 207937
123H	Bottom Louver Frame Support	(1) 208637	(2) 208637	(3) 208637
123J	Louver Frame Side	(2) 207936	(4) 207936	(6) 207936
	Hardware Bag	(1) 208358	(2) 208358	(3) 208358
123K	Each Bag contains: (38) 195638, Screws, #8-18 x 3/8" long AB point, slotted indented serrated hex washer head; (7) 195046, Compression Springs (for louvers); and (18) 195249, #8 x 1/2" long TEKS (self-drilling screws)			


Code 124 - Hanger Kit, Same as Option CK10

Code	Model LDAP	All Sizes
124	Swivel Hanger Kit for 1" Pipe (Same as Option CK10)	207938
Components:		
124A	Hanger Connector (Swivel) Assembly	(4) 207939
124B	Lockwasher	(4) 45549

Cabinet Parts


Code	Description	LDAP 400	LDAP 800	LDAP 1200
130	Bottom Panel Assembly	(1) 207677	(2) 207677	(3) 207677
131	Side Air Baffle (interior, not illustrated)	(2) 207610	(4) 207610	(6) 207610
132	Right Side Panel	(1) 207558	(2) 207558	(3) 207558
133	Hole Plug	(1) 16452	■	■
134	Left Side Panel	(1) 207559	(2) 207559	(3) 207559
135	Left Intermediate Panel	■	(1) 208026	(2) 208026
136	Right Intermediate Panel	■	(1) 208027	(2) 208027
137	Splice Plate Top and Bottom	■	(2) 207566	(4) 207566
138	Fan (Top) Panel	(1) 207564	(1) 207564 / (1) 208044	(1) 207564 / (2) 208044
139	Outlet Collar, 6"	(1) 195662	■	■
140	Splice Plate Assembly	■	(2) 207731	(4) 207731
141	Heat Section Flue Wrapper Assembly	(1) 207561	(2) 207561	(3) 207561
142	Static Pressure Tap in Flue Wrapper	(1) 116043	(2) 116043	(3) 116043
143	Side Gasket for Heat Section Flue Wrapper	(2) 170037	(4) 170037	(6) 170037
144	Top/Bottom Gasket for Heat Section Flue Wrapper	(2) 170039	(4) 170039	(6) 170039
145	System Flue Collection Box Bottom and Rear	■	(1) 207568	(1) 207569
146	Gasket between Fan Panel & Flue Collection Box	■	(2) 207732	(3) 207732
147	System Flue Collection Box Top and Front	■	(1) 207570	(1) 207571
148	System Flue Collection Box End	■	(1) 207579	
149	System Flue Collection Box Exhauster End	■	(1) 207580	(1) 207581
150	Access Door	(1) 207572	(2) 207572	(3) 207572
151	Door Handle	(1) 196881	(1) 196881	(1) 196881
152	Rear Panel (See Code 80, page 6.)	(1) 207553	(2) 207553	(3) 207553
153	Mid Heat Exchanger Support	(1) 207554	(2) 207554	(3) 207554
154	Tube Support Channels	(4) 207552	(8) 207552	(12) 207552
	(See Code 80, page 6) Attach to rear panel with screws.			
155	Bottom Heat Exchanger Support (not illustrated)	(1) 207555	(2) 207555	(3) 207555
156	Strut (top of unit)	(2) 207573	(2) 207574	(2) 207575
157	Louver	(7) 195578	(14) 195578	(21) 195578
158	Hardware Package Shipped w/Heater (hanger & louver hardware)	(1) 208347	(1) 208834	(1) 208835
158A	Compression Spring for Louvers	(7) 195046	(14) 195046	(21) 195046
158B	A-100-1/2 Regular Spring Nut for Hanging Heater		(4) 158598	
158C	U-Shape Fitting AB-288-1/2 for Hanging Heater		(4) 207874	
158D	1/2" Lockwasher for Hanging Heater		(4) 45549	
158E	1/2"-13 Hex Nut for Hanging Heater		(4) 45550	
159	Vent Cap (Same as Option CC1)	(1) 111850, 6"	(1) 147149, 8"	
160	Touchup Paint, 11 oz spray can, white		201805	

Top View of a Model LDAP 1200 (Model 800 is the same less the middle heat section)

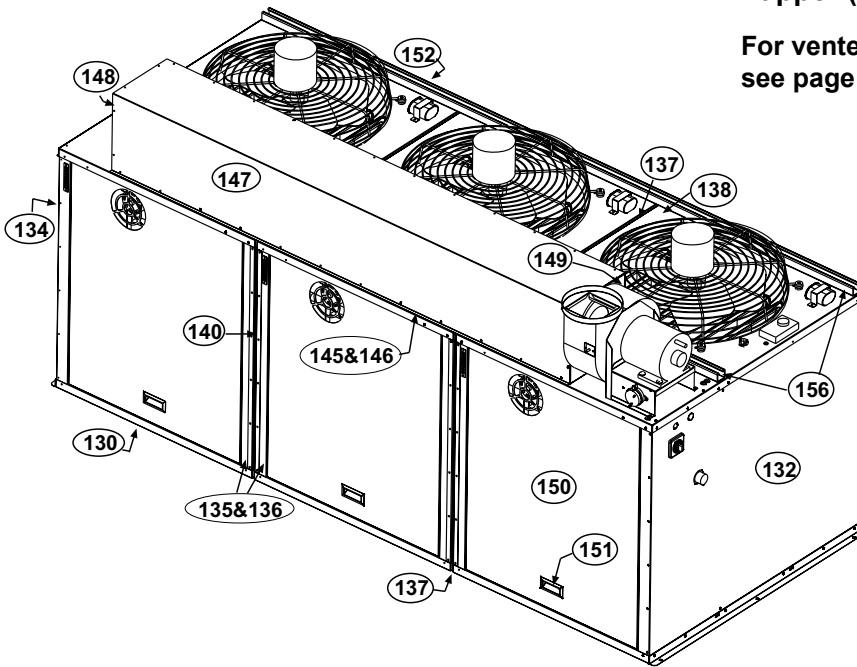

Top View of a Model LDAP 400 and a Heat Section Flue Wrapper (all sizes)

For venter parts, see page 5.

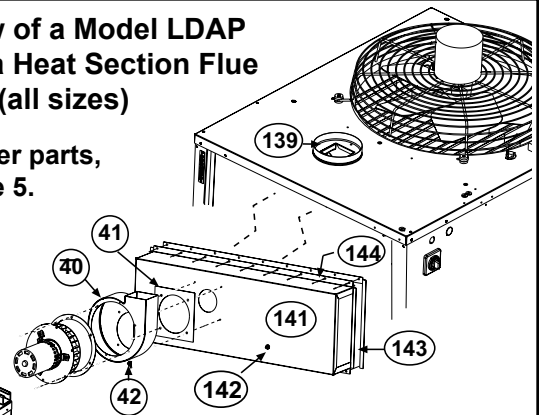

Code 159 - Vent Cap

